

DATASHEET

CAPTURE MODULE LIN Combo

General description

The Capture Module LIN Combo is an active tap device designed to capture LIN traffic from up to 10 LIN busses, analog signals on up to 4 ports and galvanically isolated analog signals on 2 ports. The received data is captured and HW timestamped without causing interference on the in-vehicle-network (IVN) and sent out to the data sink (e.g. data logger or PC).

Standardized logging protocol

The Capture Module encapsulates logged frames into an ethernet frame adding **valuable** information such as the HW timestamp, Interface ID, Counter and more in a standardized logging protocol header.

Scalable setups

Several Capture Modules can be combined and used together in the same measurement network. The built-in time synchronization feature allows to synchronize the whole measurement network with the same time base. This makes the Capture Modules very scalable and allows to add other IVN technologies to the measurement setup.

Application Areas

Capture Modules are designed to be used in different environments such as in the car, on a development desk or in testbenches. In order to cover these areas as best as possible, the devices allow continuous operation and a wide temperature range.

Optimized logging

Startup time is crucial in an in-vehicle-network. Therefore, the Capture Modules are developed to provide an optimized startup time to be ready to log before the ECUs are up and send data. In addition to that, the Capture Module is equipped with an internal buffer to store the first frames (sent from the ECUs), even if the data sink is not yet ready. As soon as the data sink is up and ready to receive data, all the stored data will be sent out. With the packetization and output traffic shaping feature the Capture Module can adjust the size of the logging frames and have the possibility to maintain a consistent data flow (to the logger or the test PC). This way it actively prevents forwarding of bursts. The combination of these features ensures that no frames are lost.

Configuration

The CM offers a flexible and user-friendly configuration through its built-in web server. The device webpage can be easily accessed via a standard web browser. In addition, the possibility to import/export a configuration makes it even more convenient.



Capture Module LIN Combo

Technical Data


Operating temperature	-40 °C to +80 °C
Supply Voltage	6.5 V to 24 V DC (typ. 12 V)
Power consumption	4.8 to 6 Watt
IP Protection Class	IP 20
Housing Dimensions	133 x 130 x 33 mm
Weight	0.5 kg (approx.)
Interfaces	10x LIN (MQS) 4x Analog (MQS) for voltage measurement 2x galvanically isolated Analog (MQS) for voltage measurement 1x 1000BASE-T (RJ-45) for Config, Logging, Sync 1x 100BASE-T1 (MQS) for Config, Logging, Sync 1x 100BASE-T1 (MQS) for Config 2x Wake in/out (MQS)
Transceiver	TJA1024 & TJA1022

Features of Capture Module LIN Combo

Device Features	Configuration Webpage
	Wake-/Sleep
	Import-/Export of Configurations
	Status LEDs
	TECMP / ASAM CMP
	Status Messages
	Manual IP Configuration via Rotary Switch
	Optimized Startup + Startup Buffer
	Cascading
	Hardware Timestamping with 40ns Resolution
	Time Synchronization (gPTP/802.1AS-2011 AVnu profile or PTPv2 subset)
	Packetization
	Output Traffic Shaping
Basic + advanced Filtering	
Sync Events	
Transmission Feature*	LIN Transmission (5x Master/Slave)

* License needs to be ordered separately

Use case

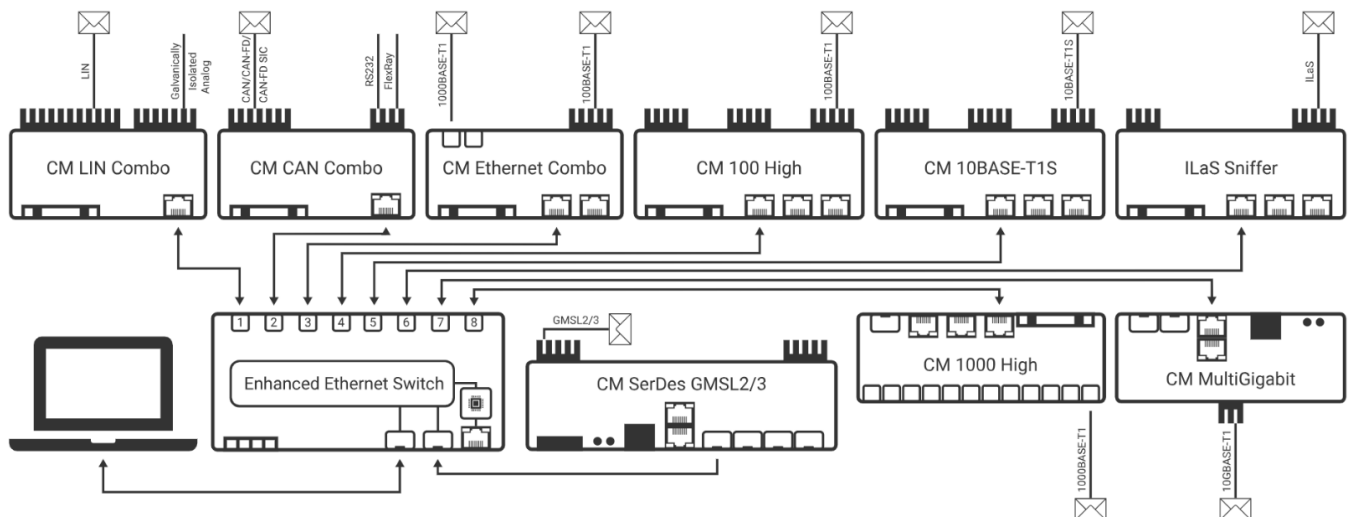

Order Information

Name	Article Number	Cable set number*	LIN transmission
Capture Module LIN Combo	TE-1170	KS-1170	FT-1170-1

*Cable set needs to be ordered separately